



## Product overview

A relocatable two-cubicle toilet block with one ceramic toilet, hand basin, ventilation and lighting in each separately entered room.

### Preorder — incoming stock

This model is currently on the way to GWS. Choose full payment or a 50% deposit to reserve a unit. Contact us for the latest expected arrival date.

## Specifications

### DIMENSIONS

2160 mm × 1300 mm × 2360 mm

### APPROX. WEIGHT

490 kg

### CONFIGURATION

Double toilet module

### STRUCTURE

Q235 steel frame and steel roof

### WALLS AND ROOF

50 mm EPS composite panels

### FLOOR

12 mm rigid PVC plus 3 mm anti-slip/wear-resistant finish

### WATER INLET

20 PPR pipe with 1/2-inch connection

### DRAIN OUTLETS

Ø40 general drain; Ø90 toilet discharge

### ELECTRICAL

concealed wiring, 16 A breaker, 32 A aviation socket, switches, lighting and

## Key features

- Two separately entered toilet cubicles
- Ceramic toilet and pedestal basin in each cubicle
- Factory electrical fit-out with lights, ventilation and circuit protection
- Factory plumbing fit-out with water and waste connection points
- Steel frame with insulated EPS composite panels
- Anti-slip and wear-resistant floor finish


### SITE CONNECTION REQUIRED

Internally wired and plumbed, but not plug and play or self-contained. Final service connections, testing and certification are required.


Toilet and hand basin




External elevation A

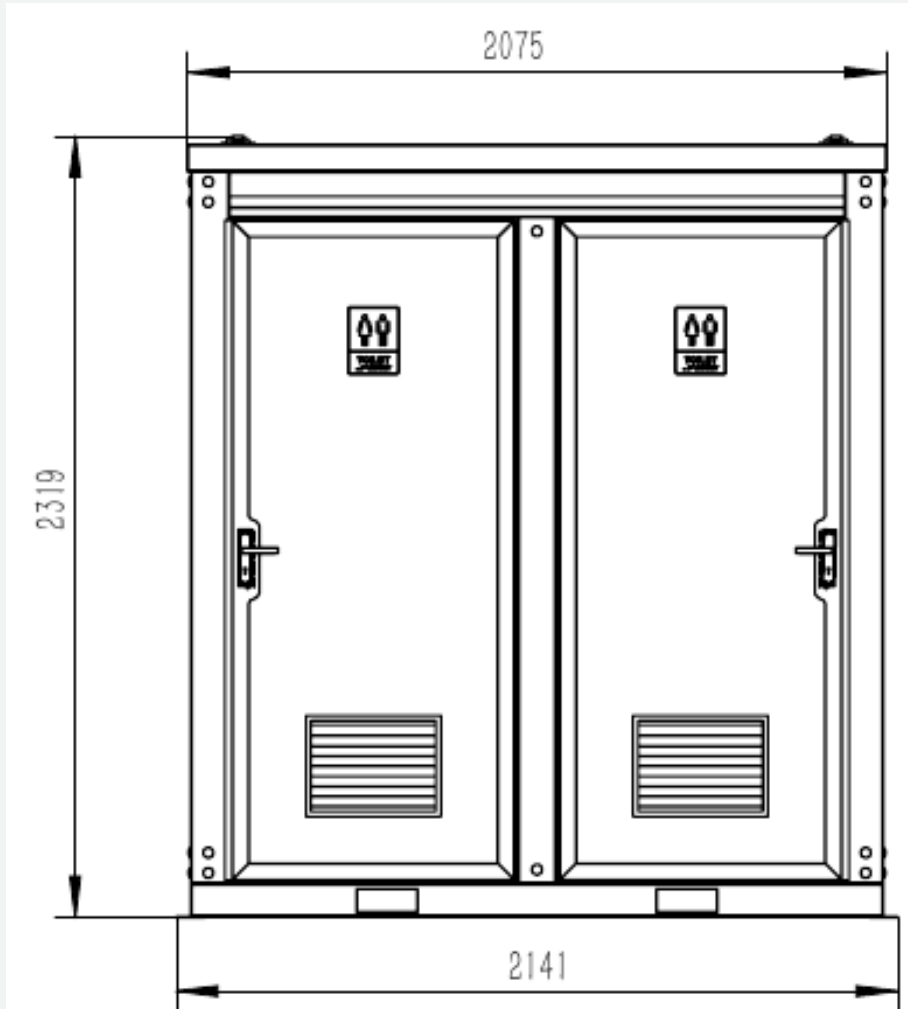


External elevation B

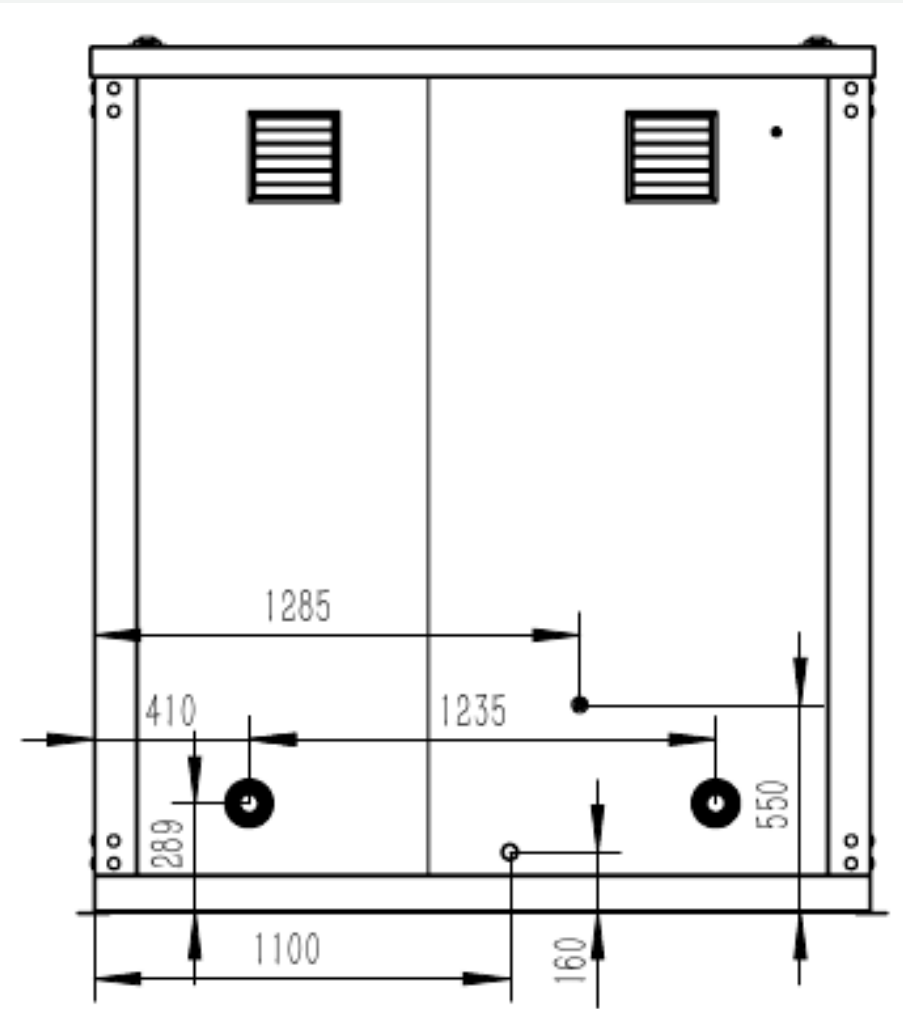

External elevation C

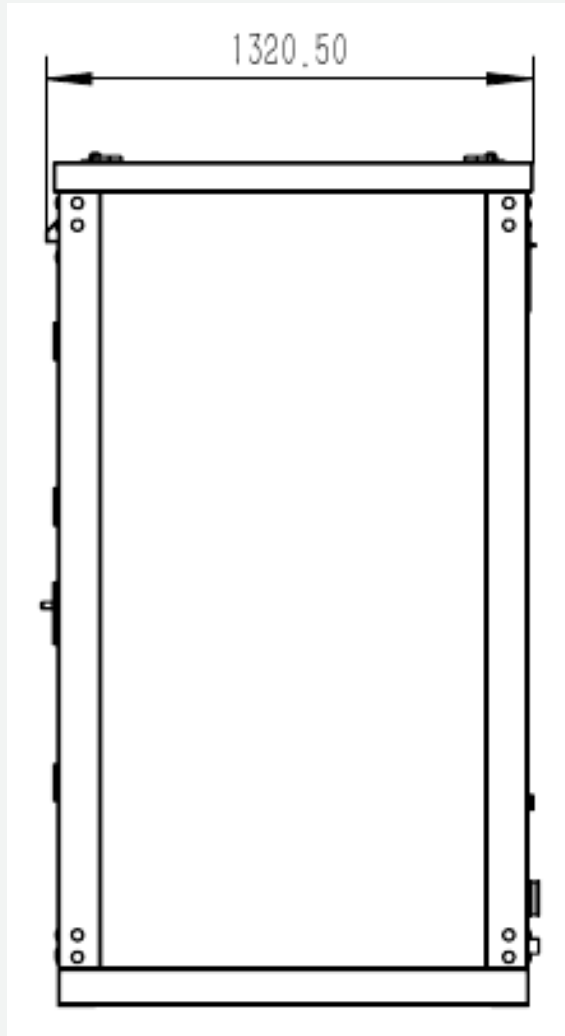


External elevation D

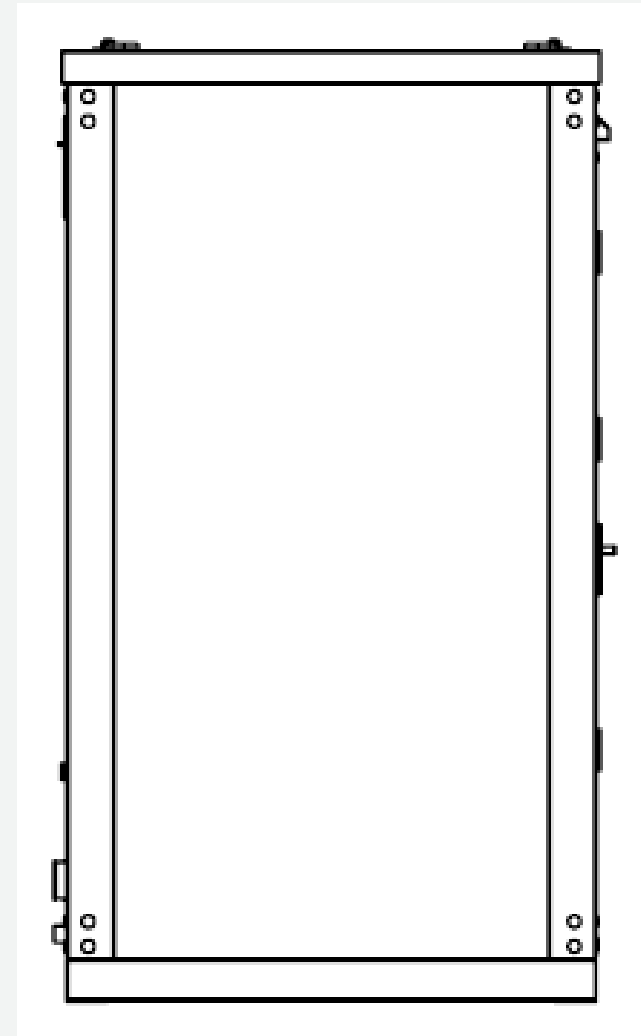


Front elevation




Bird's-eye plan

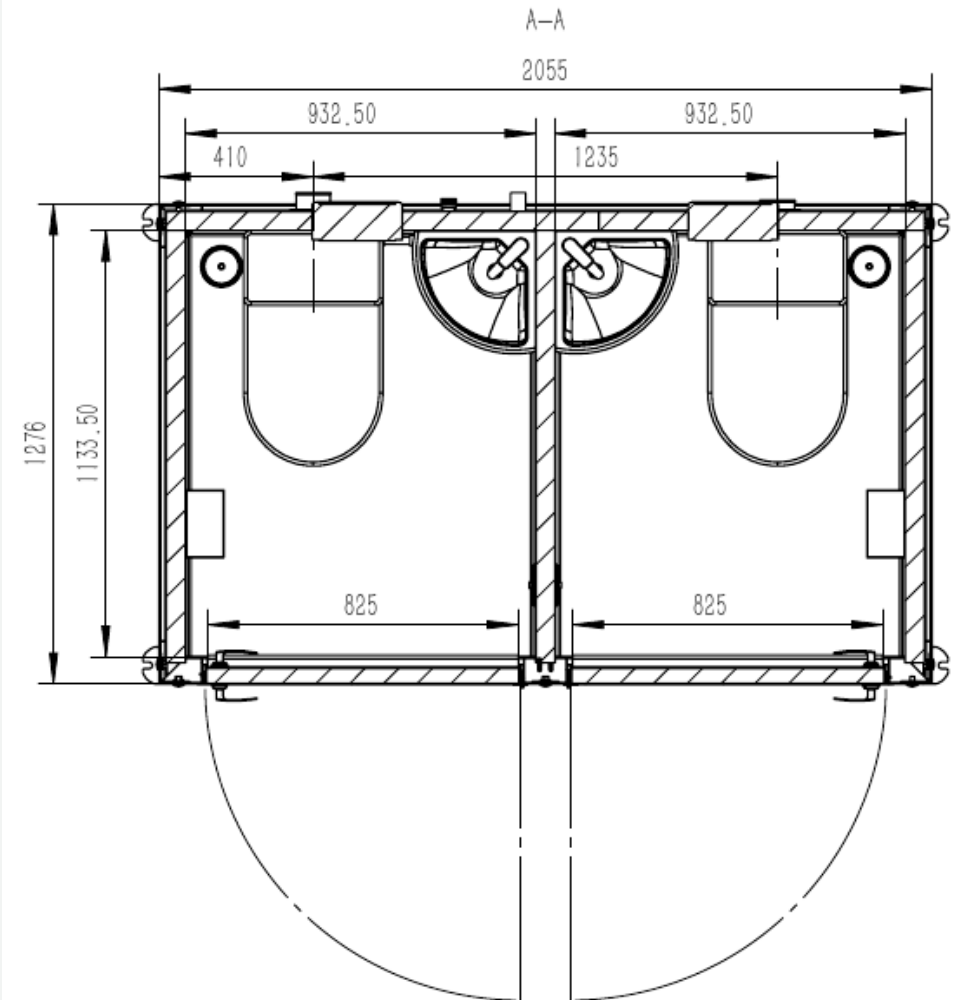

Upper section 1

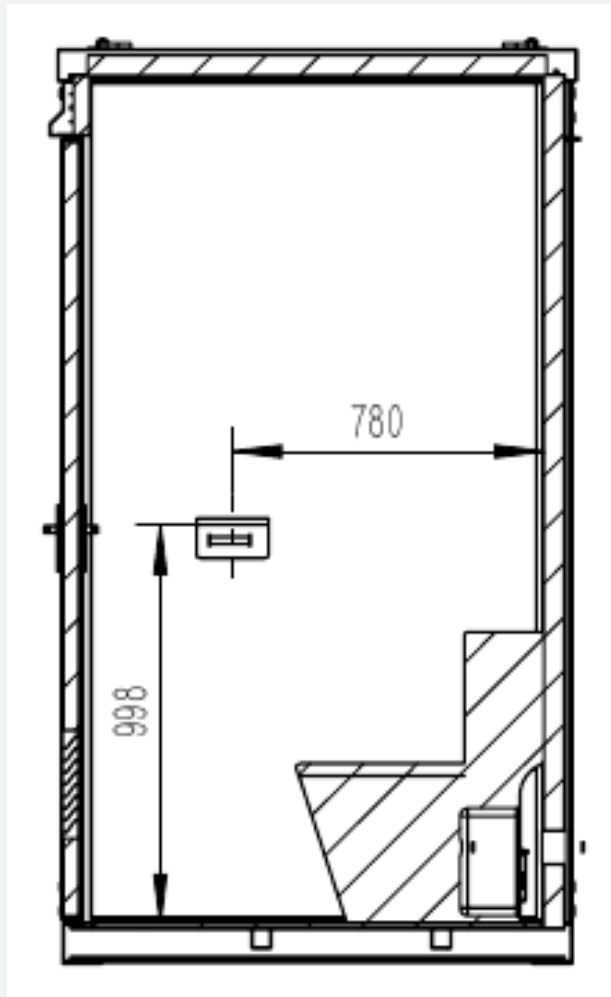


Upper section 2

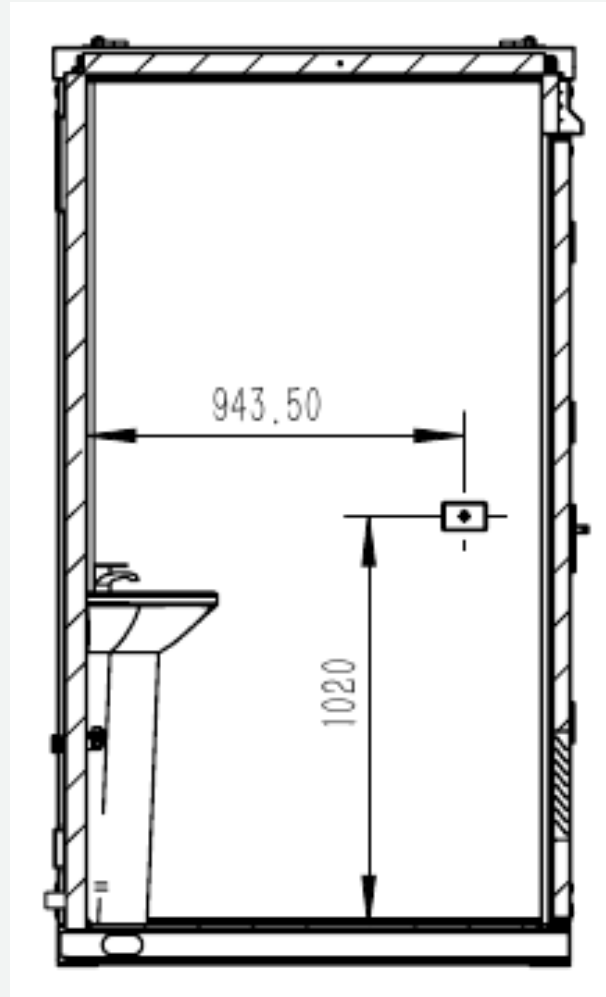


Upper section 3




Upper section 4

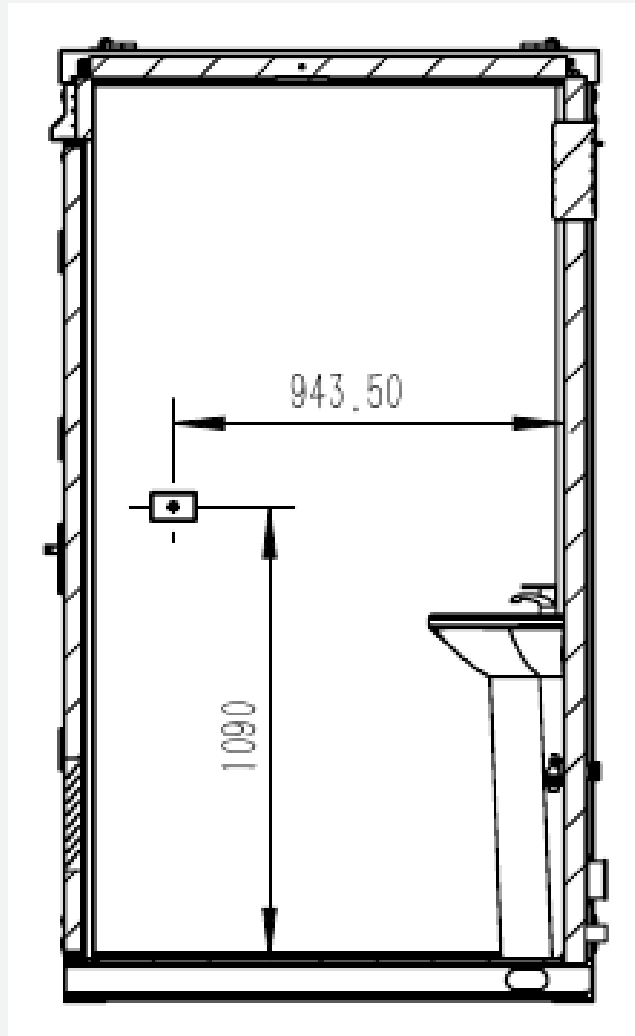


Upper section 5

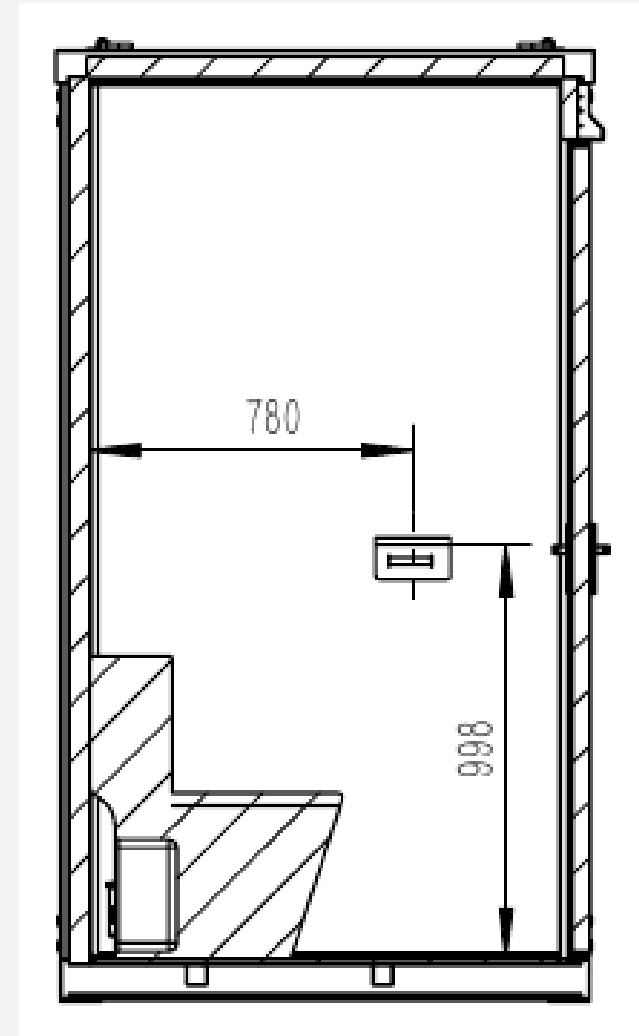

Lower section 1

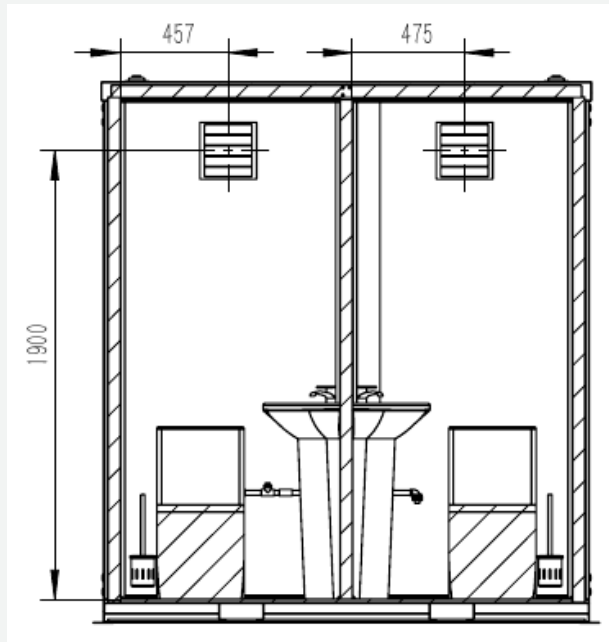

Lower section 2

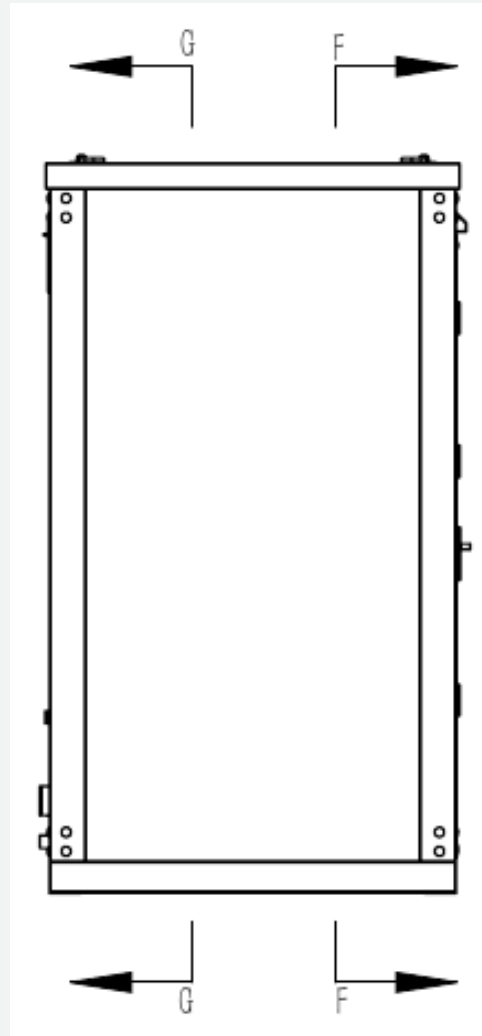

Lower section 3

